

# OPTI 421/521 – Introductory Optomechanical Engineering

## 5. Prisms

### a) *Tunnel diagrams and reduced thickness*

### b) *Motion of prisms*

beam steering  
image rotation

### c) *Common prisms and uses*

#### 90° Beam deviation

Right angle prism  
Porro (Right angle prism with roof)  
Penta prism (and roof penta prism)

#### Image rotators

Dove (+array)  
K mirrors  
Abbe (+ folded)  
Schmidt (Delta prism)  
Pechan

#### 180° beam deviation

plane mirror  
Porro  
Cube corner

#### Other

Rhomboid  
Porro erecting prisms  
Abbe erecting prisms  
Anamorphic prisms

#### References:

Mil-HDBK-141

W. Smith, *Modern Optical Engineering* (McGraw-Hill, 2000).

W. Wolfe, “Non-dispersing prisms” Ch.4 in *Handbook of Optics, Vol II*, 2<sup>nd</sup> ed. (McGraw Hill, 1996).

Yoder, P. R., *Design and Mounting of Prisms and Mirrors in Optical Instruments*, (SPIE vol. TT32, 1998)

D. Swift, “Image rotation devices – a comparative survey”, *Optics and Laser Technology*, Vol. 4, pp 175-188 (1972).

Prof. Shack’s prism program

## Tunnel diagrams and reduced distance

The optical performance of a prism can be represented by a combination of the methods used for plane mirrors and optical windows.

### *Unfolding*

All of the reflections can be unfolded.

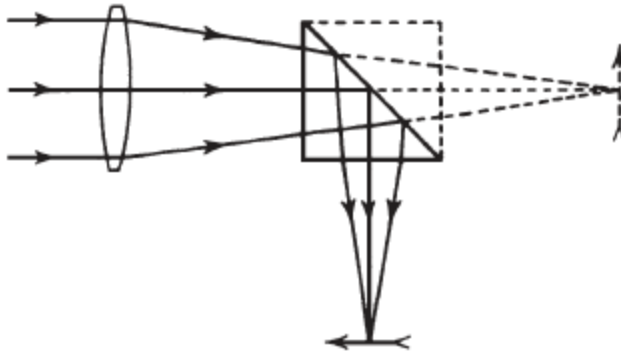


Figure 4.16

(Smith)

## Reflections in glass

Use total internal reflection if

$$n \sin \theta > 1$$

(for all angles of incidence)

**This is lossless!**

**However, the surface must be protected. A little smudge ruins it.**

**For  $n = 1.52$ , critical angle is  $41^\circ$**

**Otherwise, must use reflective coatings**

## Size of elliptical beamprint

Defined by intersection of light cone with tilted plane

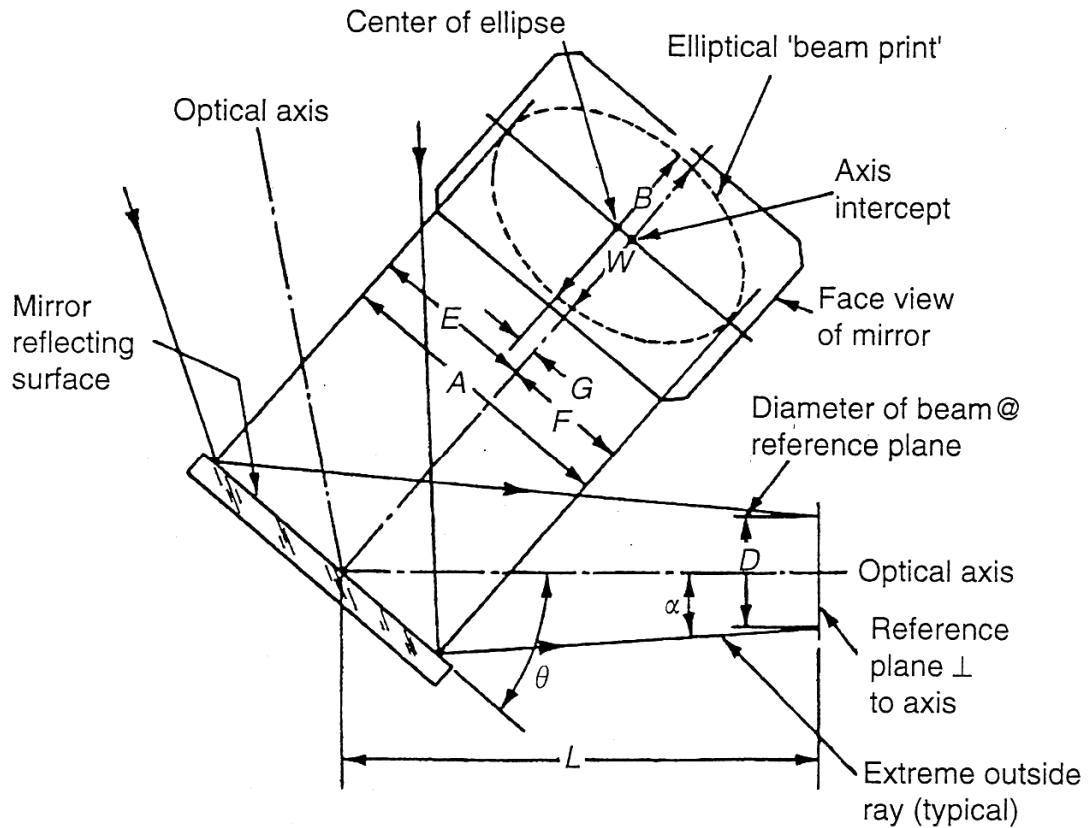


FIGURE 8.8 Geometric relationships used to define the beam print of a rotationally symmetric inclined mirror. (Adapted from Schubert, F., *Mach. Des.*, 51, 128, 1979.)

$$W = D + 2L \tan \alpha$$

$$A = E + F$$

$$E = \frac{W \cos \alpha}{2 \sin(\theta - \alpha)}$$

$$G = (A/2) - F$$


$$F = \frac{W \cos \alpha}{2 \sin(\theta + \alpha)}$$

$$B = \frac{AW}{(A^2 - 4G^2)^{1/2}}$$


Yoder, Paul R., Jr., *Opto-Mechanical Systems Design*, 3<sup>rd</sup> Ed., (CRC Press, 2006)

## Reduced distance

Remember that plane parallel plate causes an image shift


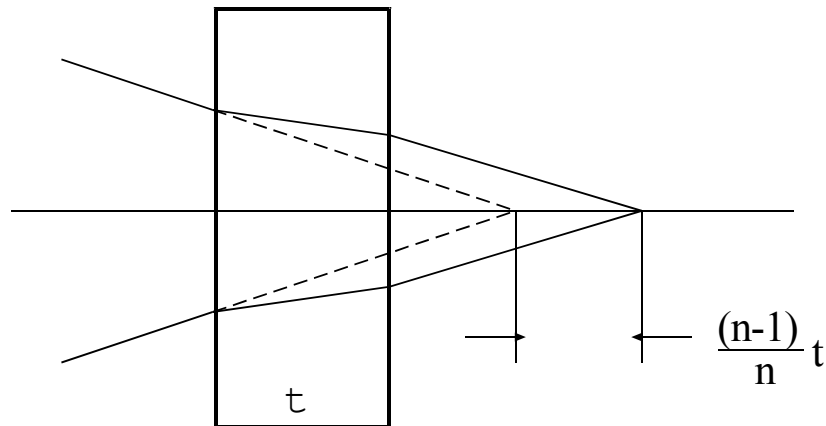


The effect of the image shift from the glass can be accommodated by replacing the glass with the air-space equivalent. If the path length in glass (with refractive index  $n$ ) is  $L$ , then the reduced distance is  $L/n$ .

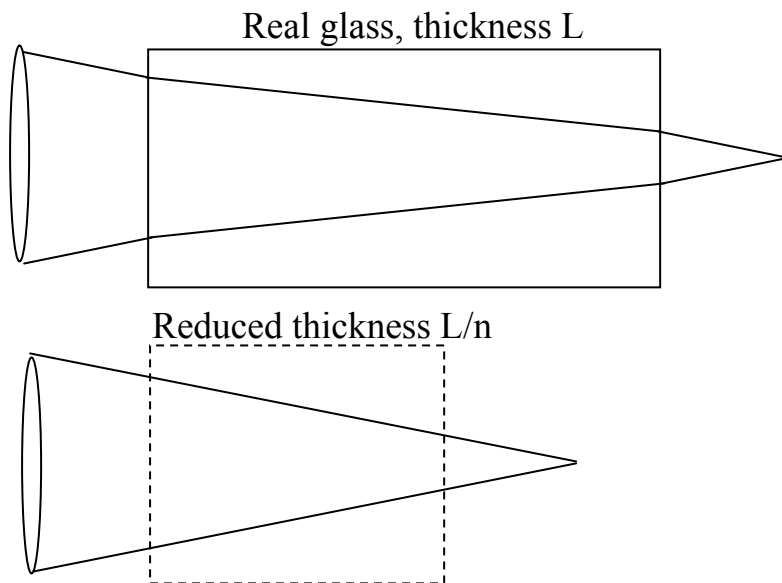


# Tunnel diagrams

To represent the first-order properties of the prism, first unfold all reflections, then squash the length to the reduced distance.

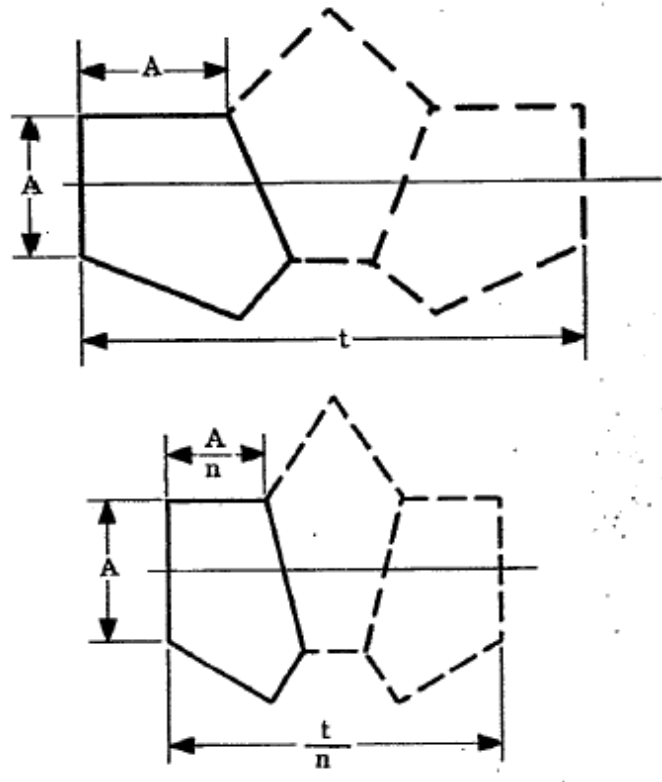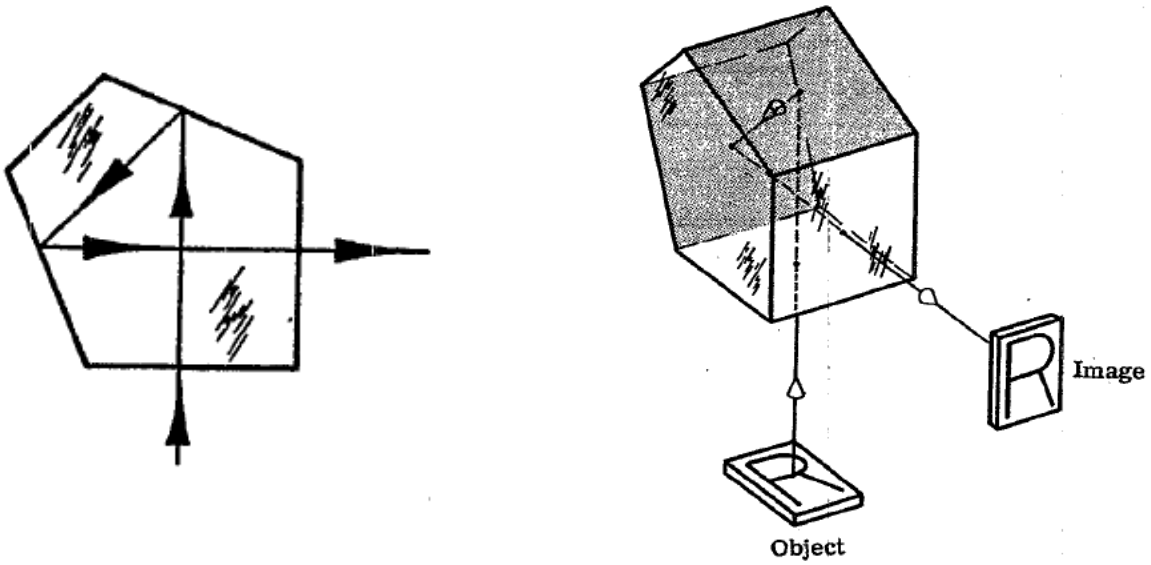


**Penta prism gives 90° deviation**

## Image orientations

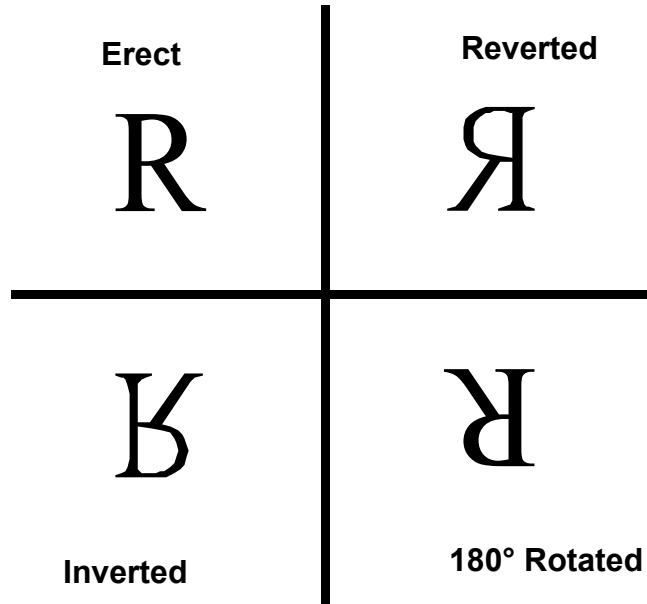


### Prism deviation Direct vision

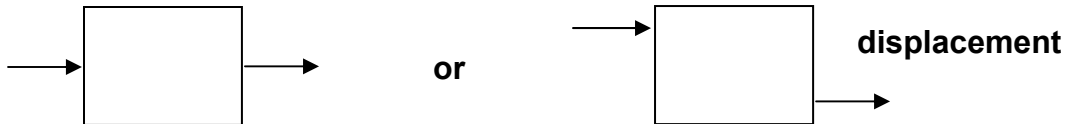


### 45° deviation




### 90° deviation



### 180° deviation



# Prism Rotation

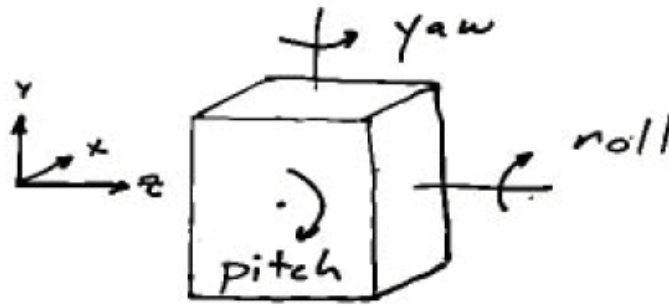

Send coordinate system through  
 Line of sight (LOS)  $z \rightarrow z'$   
 use symmetry to send  $x$  or  $y$   
 $x \rightarrow x'$



check parity

Even # of reflections

Even parity - Right Handed


odd # of reflections

odd parity Left Handed

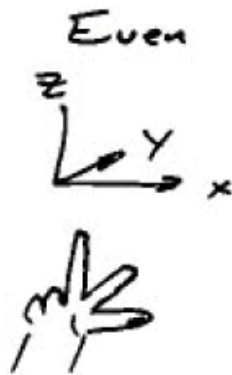

## 90° deviation prisms

### Right angle prism

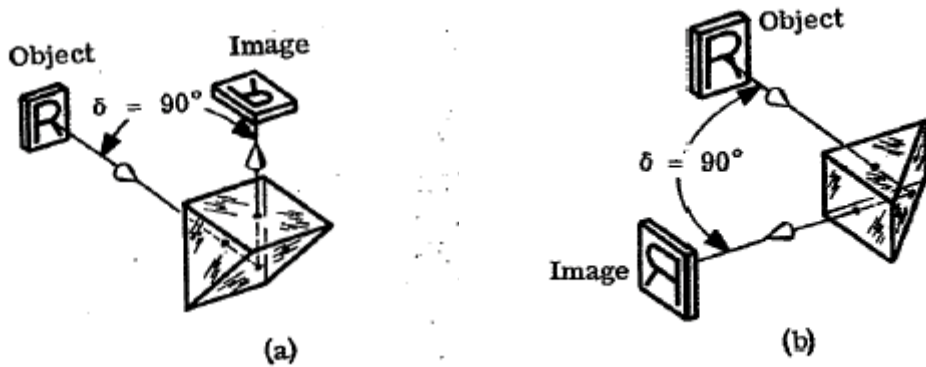

(Mil-Hdbk-141)

### Amici prism (sometimes called a roof prism)

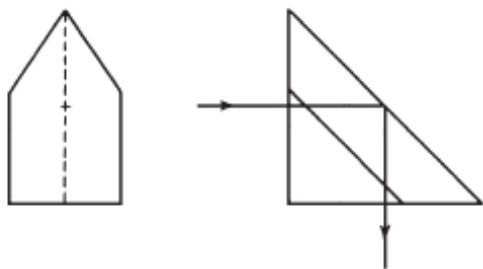


Figure 4.21 prism.

The "V" indicates roof



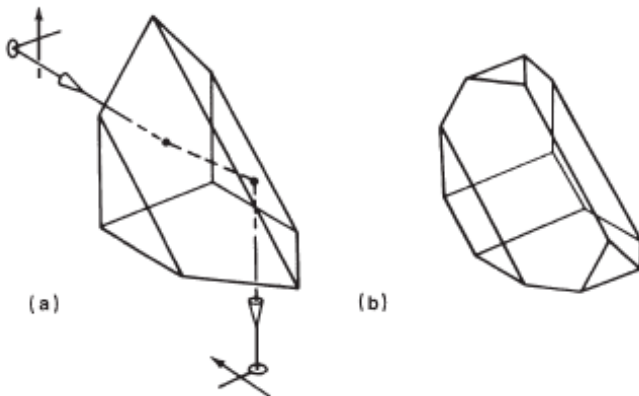


Figure 4.22 Amici prism (a) showing a single ray path through the prism and indicating the image orientation, (b) with truncated corners to reduce weight without sacrifice of useful aperture.

(Smith)



## Porro prism

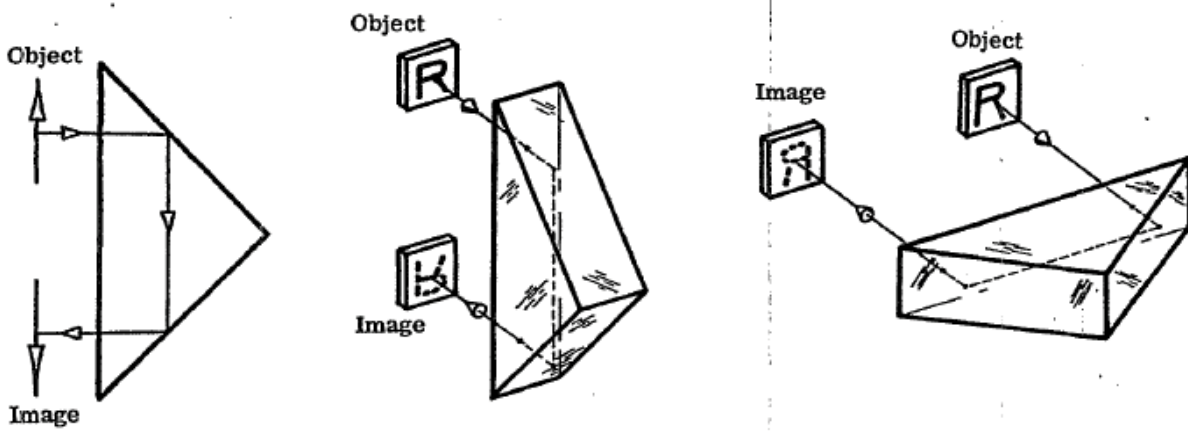

This gives  $180^\circ$  deviation + inversion

Deviation is insensitive to prism pitch

## Tunnel diagram

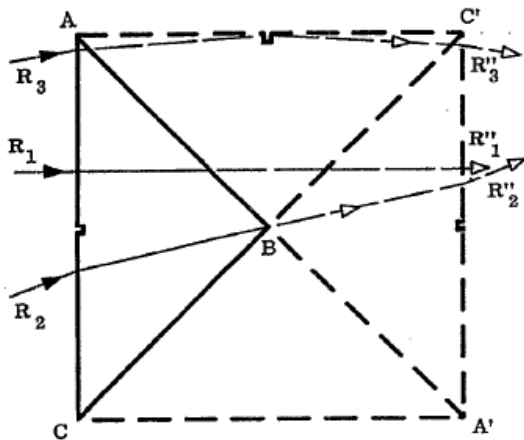


Figure 13.28-Porro prism tunnel diagram.





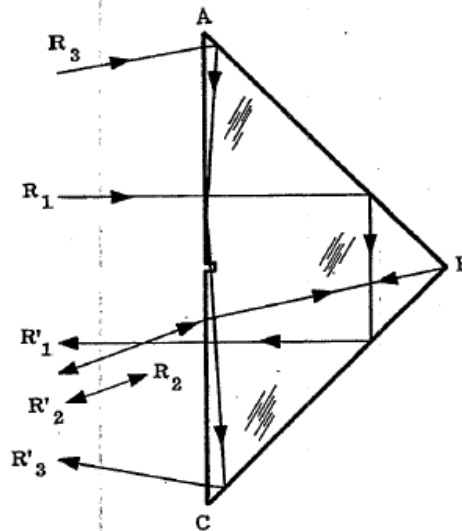


Figure 13.29-The Porro prism.

## Applications of Porro prisms

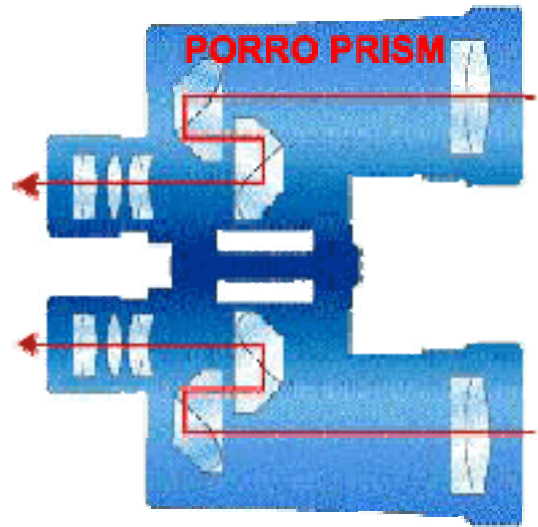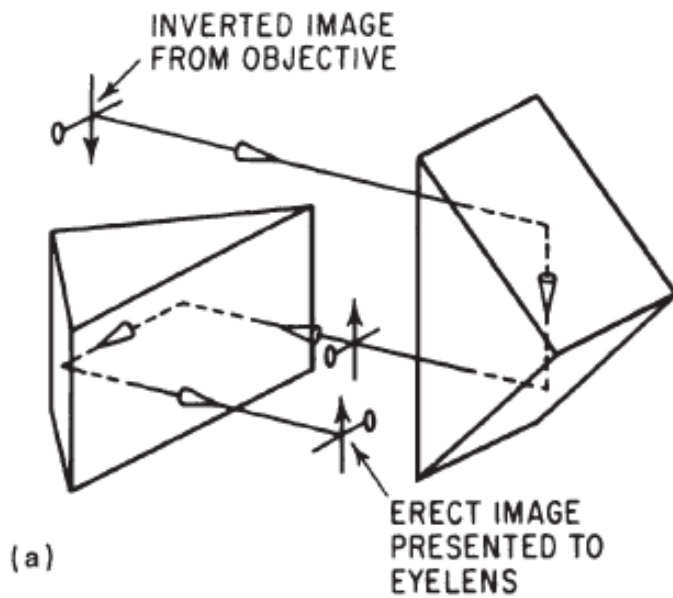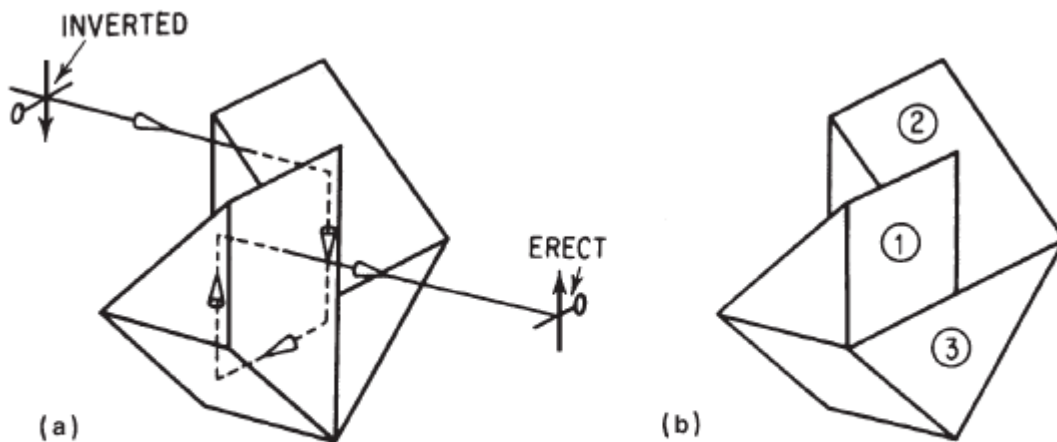

**Figure 4.24** Porro prism system (first type) (a) indicating the way the Porro system erects an inverted image. (b) Porro prisms are usually fabricated with rounded ends to save space and weight. Note that the spacing between the prisms has been shown increased for clarity.

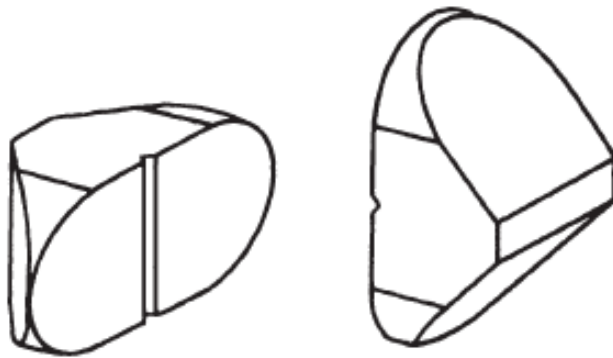


**Figure 4.25** Porro prism system (second type) (a) indicating the erection of an inverted image. This system is shown made from two prisms in (a) and from three prisms in (b).

(Smith)


# Penta prism

Deviates light by  $90^\circ$  (independent of prism pitch angle)


(This is one of the “magic” prisms)

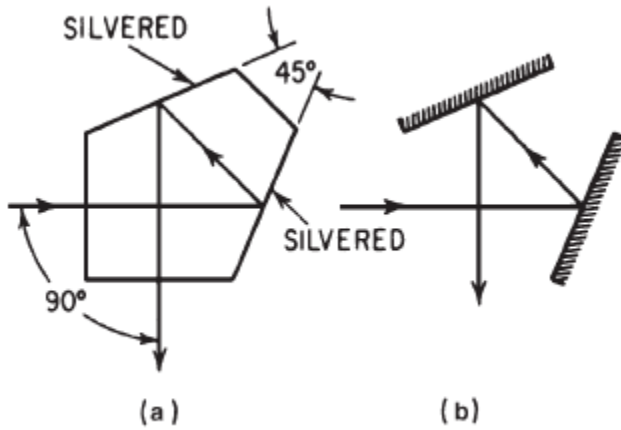

Roof penta prism

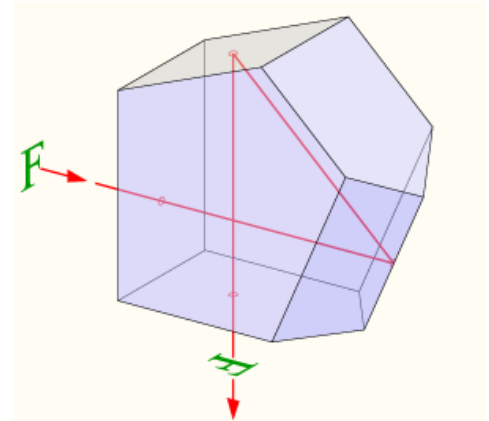


(Smith)

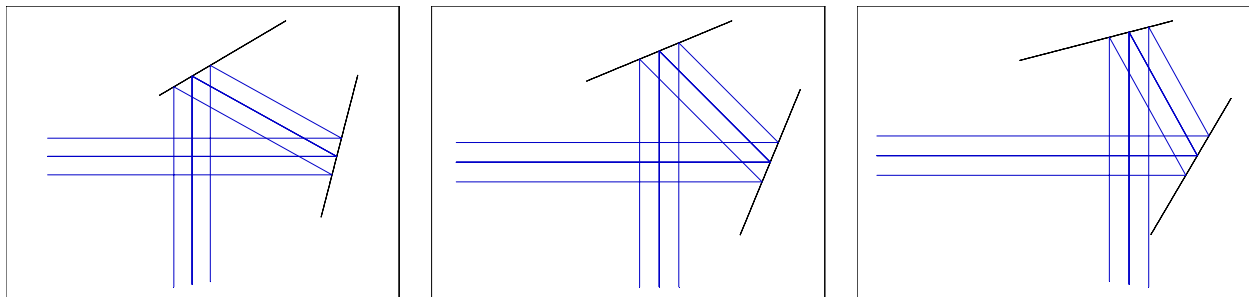

**What about roll and yaw?**

## Direct Vision prisms Rhomboid

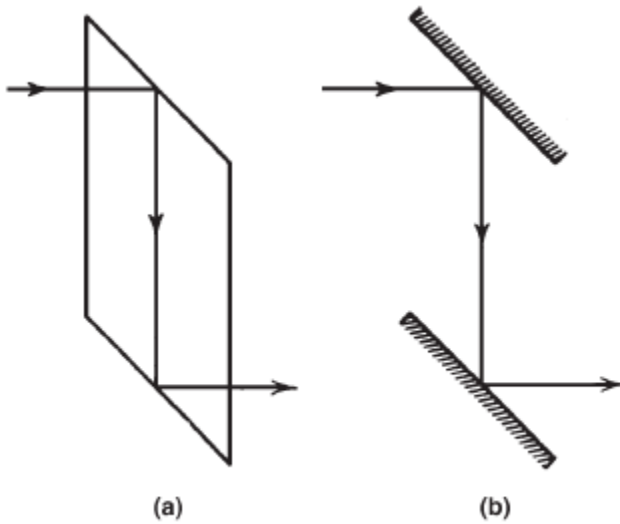


**Figure 4.30** (a) Rhomboid prism. (b) An equivalent mirror system. Both systems displace the optical axis without deviation or reorientation of the image.

**This is a “magic” prism.**


It deviates the light, but does not change the angle *even if the prism is rotated about all axes*

Can be used in a system to create binocular output

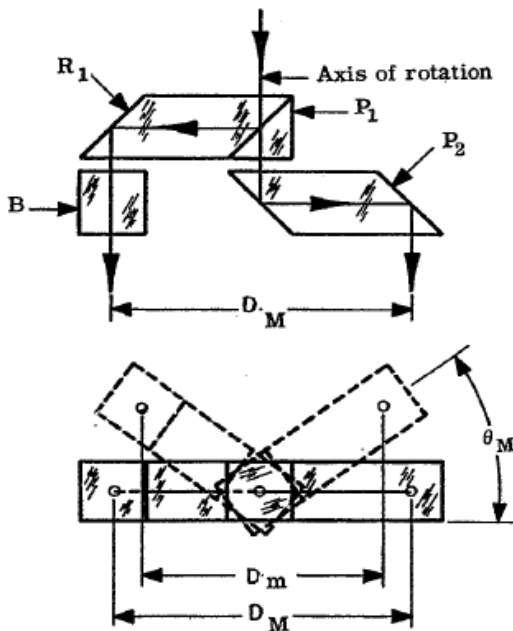

(Mil-Hdbk-141)

### Microscope Observation Tube Prisms and Beamsplitter

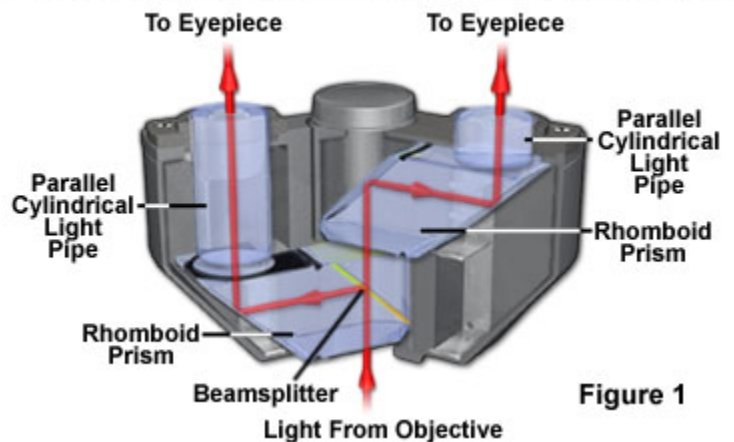


**Figure 1**



## Image rotators

For  $\theta$  rotation about optical axis, Image rotates  $2\theta$

Dove prism is most common.


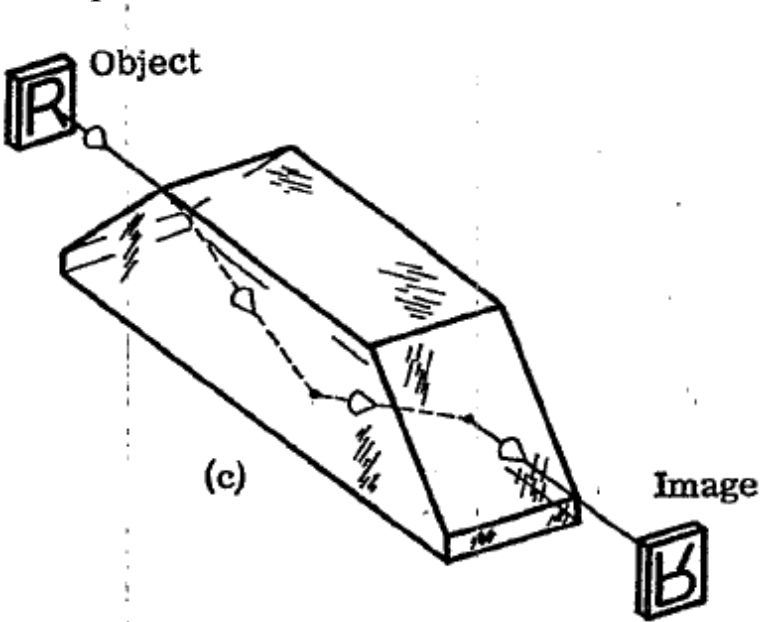


(Mil-Hdbk-141)

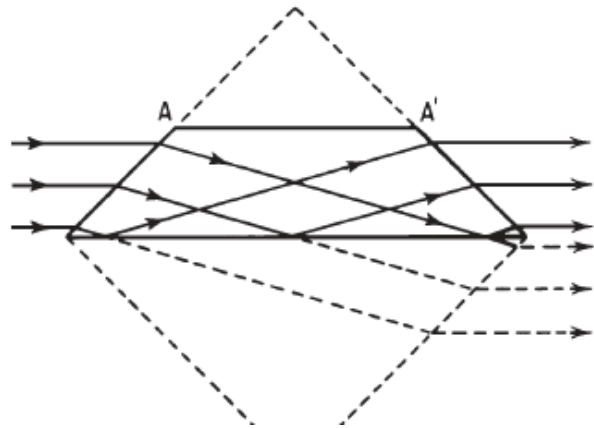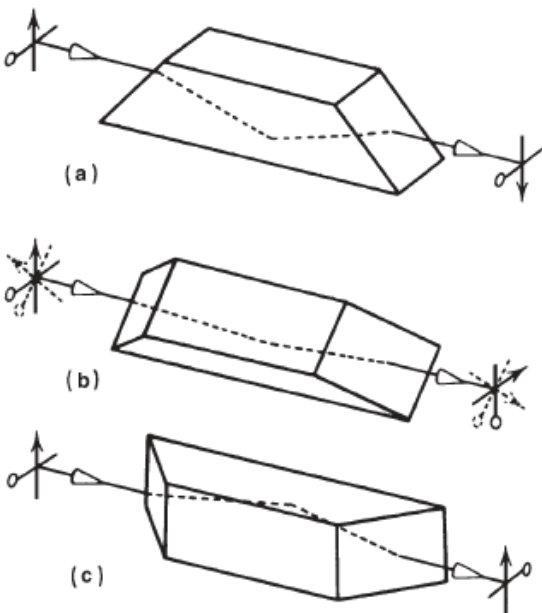

(Smith)

Dove prisms can be used in pairs and arrays

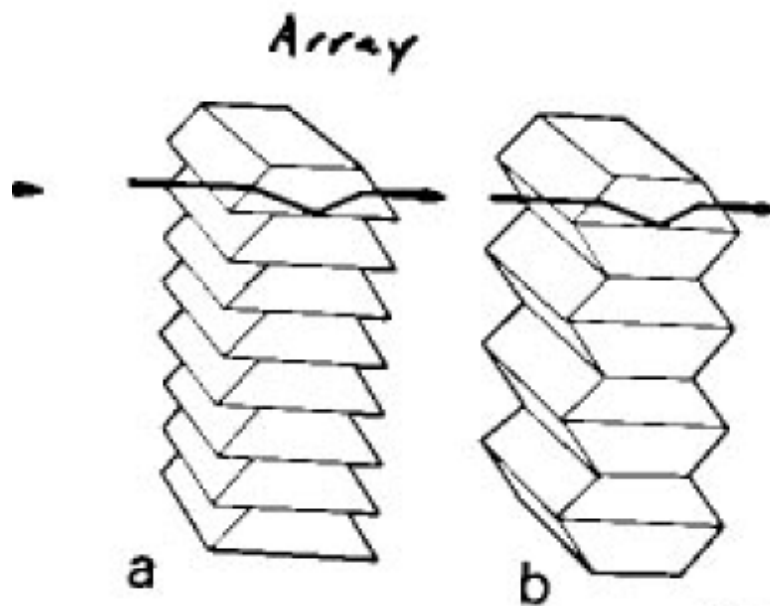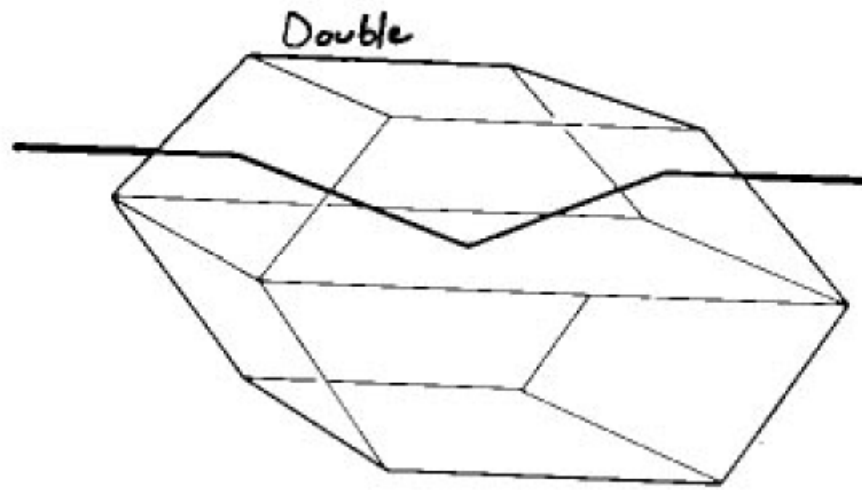

(Swift)

**Pechan prism**  
 Compact image rotator  
 Expensive






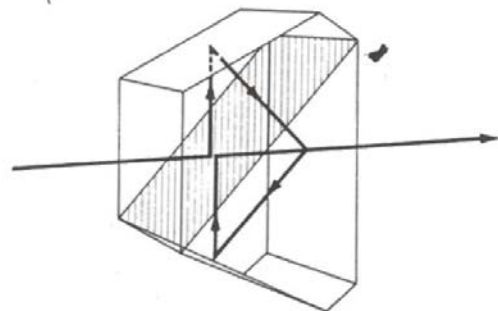


Fig. 22 Pechan rotator

(Mil-Hdbk-141, Swift)

# Pechan-Schmidt or "Roof Prism" for image inversion

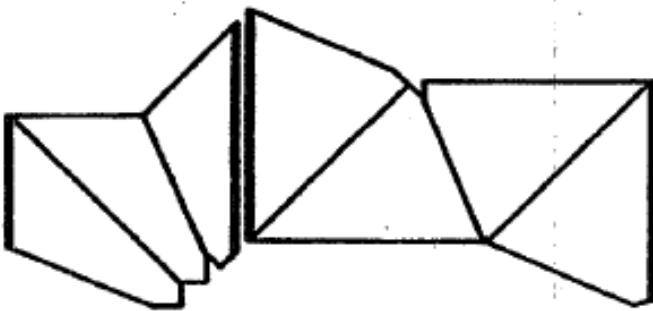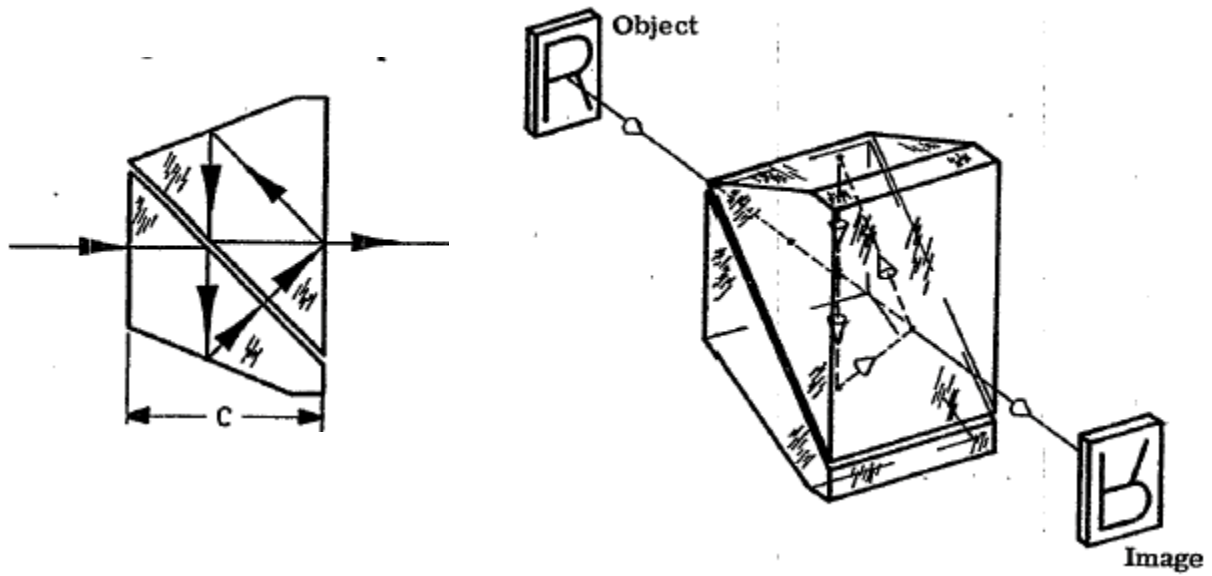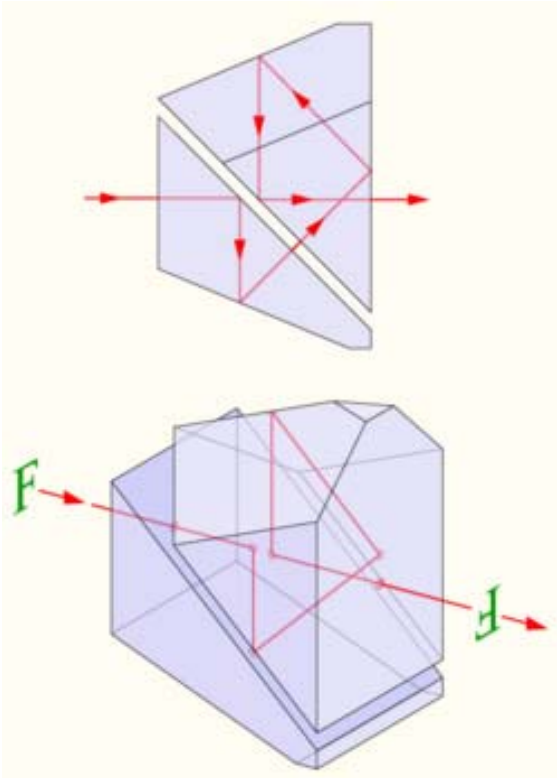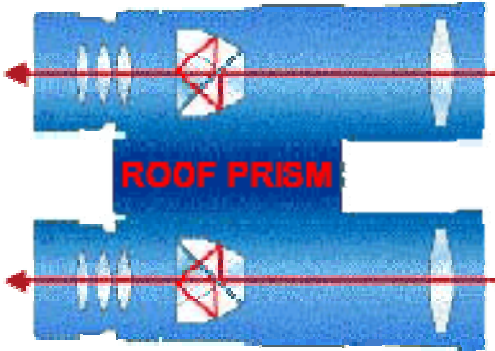

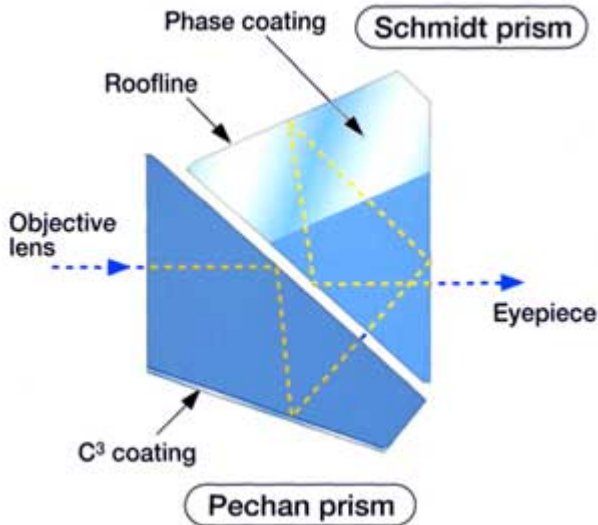

## Abbe Rotation prism

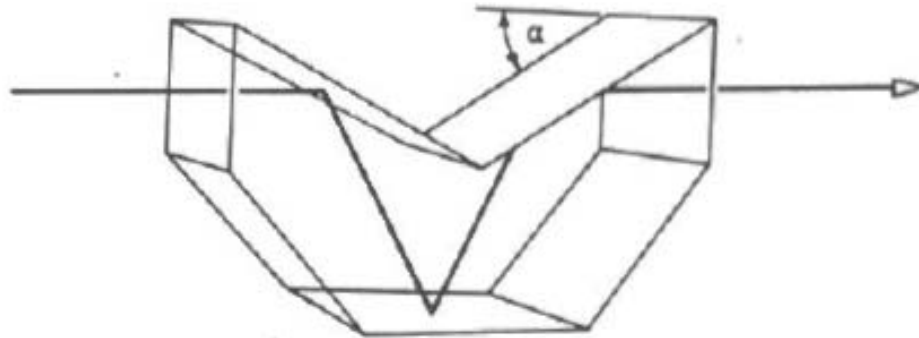


Fig. 12 Abbe type rotator

This can be made from 3 plane mirrors – same geometry

### “K-mirrors”

Also, it can be folded:


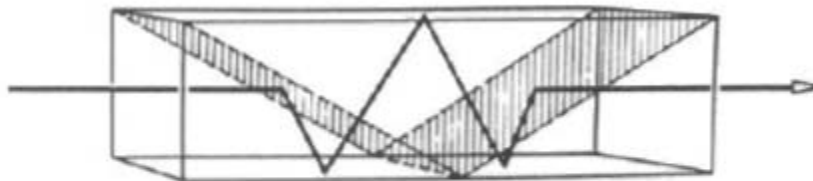


Fig. 15 Folded Abbe type rotator

(Swift)

Add a roof, Abbe-Koenig for inversion

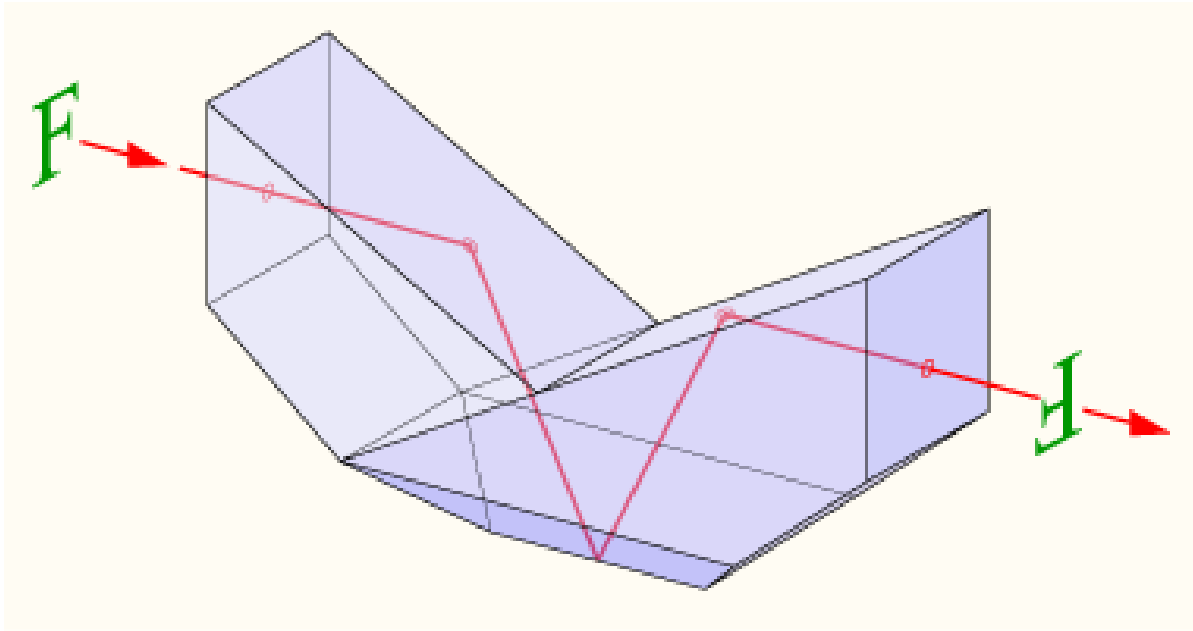

**Few surfaces !**

**Look at coordinate system in and out. Why does the roof convert the prism from an image rotation prism to an image inversion prism**



# Schmidt rotator prism

Compact image rotator  
(Folded Dove prism)  
Must be used in collimated light

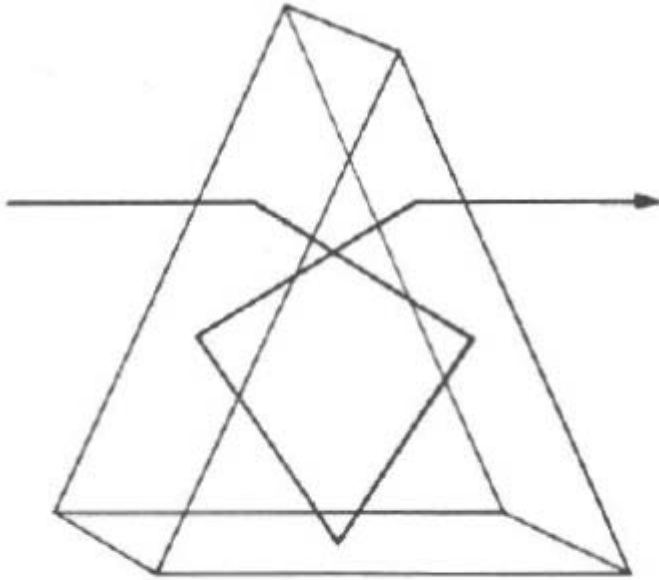


Fig. 7 Schmidt type rotator

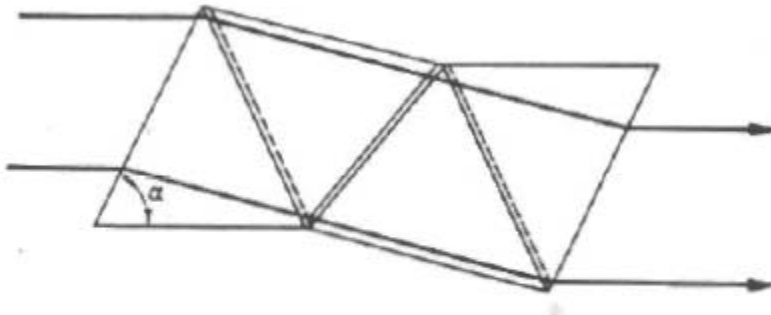


Fig. 8 Schmidt type rotator tunnel diagram  
2

Add a roof

(Swift)


## Corner Cube

(aka Cube Corner, retroreflector)

3 mirrors, arranged at  $90^\circ$  like a corner

### “Magic” prism


Light that hits all 3 mirrors is reflected in the opposite direction as the incident light – independent of orientation of the prism

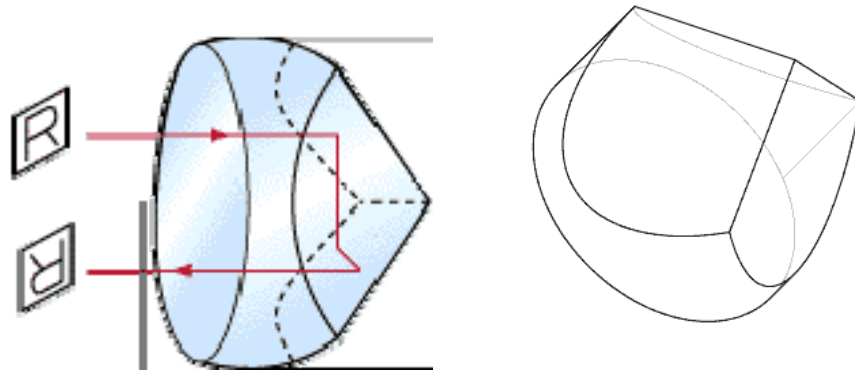

**Prism - solid glass uses inside reflections: can be TIR or silver**

**These are often used in arrays**


**Hollow- uses first surface mirrors**

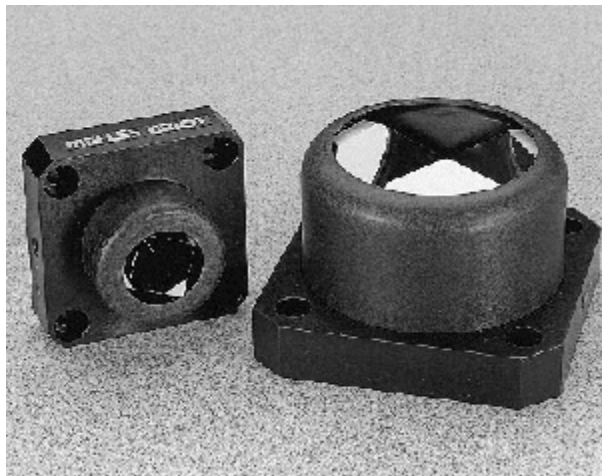

**SMR – Spherical mounted retroreflector**



## Anamorphic prism pairs

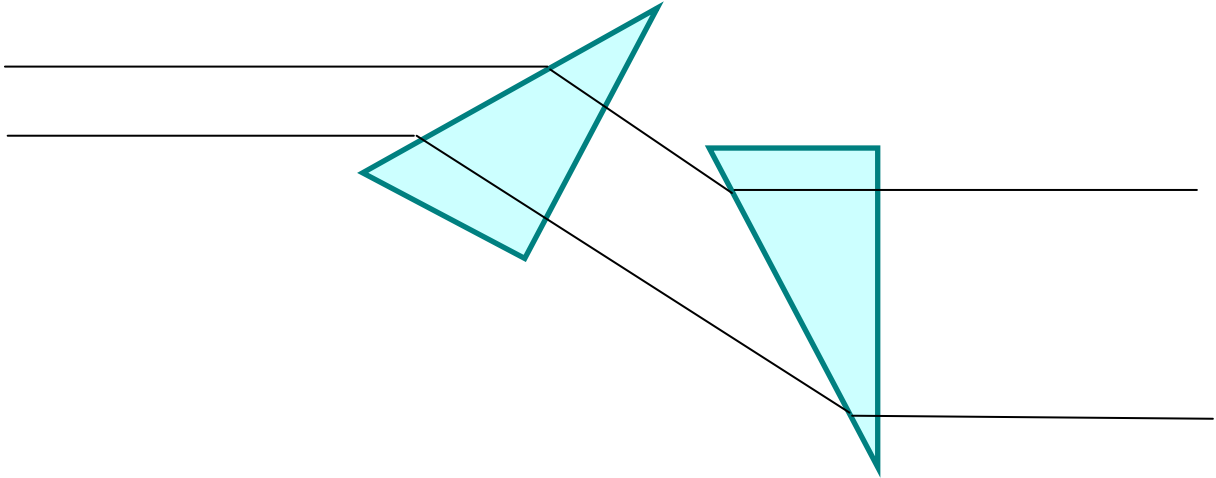

**Expands beam in one direction, not in the other**

**Used to create circular beam from laser diodes**

# Prisms (from Shack)

